



2018 Bering

77' 77

Long range, 4,000+ nautical miles, motor yacht. Portuguese bridge, raised cockpit, side decks. Enormous volume with 6 staterooms and 7'2" headroom. Well maintained.

- Power - New - Motor Yachts
- Diesel Fuel
- Steel Hull
- DANIA BEACH Florida United States

Vessel ID# 2756766

Make an Offer!

\$4,433,400 USD
 €3,971,896 Euros \$5,942,419 CAD

FEATURES:

⚓ 6 Stateroom

⚓ Portuguese Bridge Deck

⚓ 4,000+ range

⚓ Dry ride

⚓ 7'2" headroom

Description

The **Bering 77** is a very athletic and graceful long range motor yacht. Relying on the experience and lessons learned from all previous

models the Bering 77 has one on-deck departure; the Portuguese bridge deck has been merged into the foredeck making this a spectacular outdoors gathering place with comfortable seating to enjoy a front row view while underway in smooth seas.

The Bering 77 displaces 364,000 pounds and shares the bulbous bow, hard chined hull sides and twin gondola skeg underbody of her sister ships. Her bow is very high off the water and prominently features two large pocket anchors tucked into the gorgeous stainless steel backing grill. This impressive bow height translates into a dry ride and creates very tall interior proportions allowing for over 7'2" headroom throughout.

Aloft the Bering 77 features a full beam flybridge great for entertaining with a solid hardtop and that easily flows aft to a large boat deck for tender and crane storage. On the main deck level the side decks run bow to stern on both sides. The raised cockpit aft includes a outside seating area. The saloon has built in outboard seating and a large dining table.

Going up a few steps you arrive at the galley which in turn transitions into the pilothouse. The pilothouse is ideal for navigating and running the vessel.

The large interior volume lets each owner select the number of cabins and how they are layed out in a wide variety of choices.

The engine room is extremely impressive with stacked generators and twin Cummins engines in the deep gondola skegs. There is a large sea chest forward on centerline and the access for servicing machinery is extraordinary.

The Bering 77 has a range of over 4,000 miles at a cruising speed of 8 knots and travel continuously for several weeks nonstop – letting her crew enjoy the journey while crossing the seas.

Data Sheet

Category: Motor Yachts

Type: Power - New

Year: 2018

Beam: 24' "

LOA: 77' " (23.00 meters)

LOD: 74' 6"

Draft Max: 6' 2"

Cabins: 4

Heads: 4

Maximum Speed: 11 Knots

Cruise Speed: 8 Knots

Range NM: 4000

Fuel Type: Diesel


Hull Material: Steel

Fuel Tank: 7000 Gallons (Liters)

Fresh Water: 1160 Gallons (Liters)

Featured Images



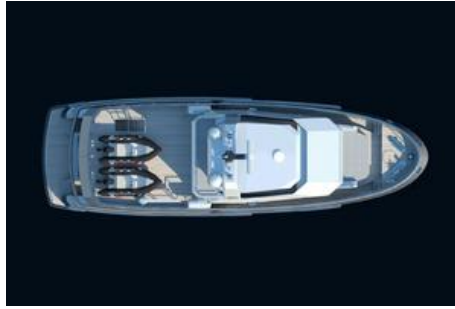

Engines

Engine 1

- Engine Make: Cummins
- Engine Model: QSM - 11
- Power HP: 300.00
- Power KW: 223.71
- Fuel Type: Diesel
- Engine Hours: 0.00

Engine 2

- Engine Make: Cummins
- Engine Model: QSM - 11
- Power HP: 300.00
- Power KW: 223.71
- Fuel Type: Diesel
- Engine Hours: 0.00

Additional Information

[Bering 77 - Video](#)

[Manufacturer Website](#)

Full Details

Engines

- (2) Cummins QSM11 300hp @ 1800 rpm continuous duty rated, raw water, heat exchanger cooled with wet exhaust. 24V electrical. Combined total power of 600 HP. Glendinning EEC4 electronic engine controls in the pilothouse. Dual 7" color engine displays in the pilothouse.
- (2) Cummins QSM11 350hp @ 1800 rpm and (2) ZF W350 marine transmissions. Optional.
- Main engines installed on soft engine mounts with weight adjusters.
- (2) ZF W325 marine transmissions with 3.95:1 reduction gear. Includes live PTO and load sense pump.
- (2) Aquamet 22 2-3/4" stainless steel propeller shafts with rope cutter.
- (2) Seatorque ST-300 shafts. Optional .
- (2) 5-blade 48/48" propellers.
- (2) Sea water intake with strainers for engines.
- Reverso GP-3014-24 (4 valves 24V) oil change system for engines and generators.
- Reverso GP-3012-24 (2 valves 24V) oil change system for gear boxes.
- (2) Centek vertical combo-sep mufflers with De Angelo exhaust mixers. Exhaust outlets on port and starboard sides of the hull.

Steering system

- (2) 12 square foot air foil steel rudders with 4" diameter steel rudder stock mounted on rudder shoe bearings. Rudder posts in lazarette above waterline and attached to bronze rudder arms.
- Kobelt hydraulic power steering system.
- Emergency tiller in the lazarette.
- Zinc anodes on rudders to ensure galvanic corrosion protection.

Mooring system

- (2) 180Kg N-type stainless steel anchors.
- Fitted using 316 stainless steel pockets - port and starboard.
- Divided chain locker with drains overboard.
- 400 Feet of 16mm zinc coated anchor chain per side. Rated for high working loads.
- 316 polished stainless steel bow protection plate.
- (2) Maxwell VWC4500 series hydraulic windlasses with deck foot switches.
- Dual chain stoppers with tensioners. Stainless steel, grooved bow rollers.
- Sidepower MTR-550Kg (1,210 Lb.) hydraulic bow thrusters.
- Sidepower MTR-550Kg (1,210 Lb.) hydraulic stern thrusters. Optional.
- (3) heavy duty bollards installed on bow. (4) heavy duty bollards mounted on the aft deck. Two stainless steel hawse pipes with horn cleats mounted amidships, port and starboard.
- All mooring components are polished stainless steel with chafe guards.
- (2) Maxwell VC1500 (1,200W 24V) electric rope capstans mounted in cockpit. Optional.

Electrical system

Main Features:

- Entire AC and DC electrical system designed and installed in compliance with ABYC electrical standards.
- 60 Hz 120/240V AC power standard.
- 24V DC power standard
- 12V DC power for nav/com electronics.
- Primary distribution 120V/240V AC and 24 V DC electrical panels, inverters, battery chargers, batteries and battery management panels are located in the engine room.
- Secondary 120VAC, 24VDC and 12VDC panels are located in the pilot house.
- All wires are labeled at each end.
- All wire connections are properly insulated.
- All electrical hardware is bonded to the hull.
- Dedicated circuit breaker for each circuit.

Power source:

- **GENERATORS**
 - (2) Onan 27,5 QD model MDKBT 27,5 kW 120V/240V 60Hz four cylinder generators enclosed in soundshields installed in the engine room. Wet exhaust muffler with exhaust separator.
 - (2) Sea water intake with strainers for generators.
 - Both generators have digital display controls in pilothouse. Optional.
 - Both generators have automatic safety shutdowns with fault indicators.
 - (2) Racor 1000 fuel filters with 30 micron elements.
 - Reverso GP-3012-24 (4 valves 24V) oil change system for generators.
- **SHORE POWER**
 - (2) Cablemaster CM-7 50 Amp 24VDC shore cord managers. Optional.
 - (2) 50 Amp 120V/240V 30 meters shore power cords in Cablemasters. Optional.
 - (2) 50Amp shore power breaker boxes.
 - (2) marine Isolation transformers 15 KWA/240V/50-60Hz. Optional.
- **BATTERIES**
 - (17) Victron AMG 220 Amp, deep cycle, 12 VDC. Total capacity is 3,740 Amp Hours.
 - Orion 24/12-25A DC-DC converter for electronics.
 - (3) Victron Skylla TG 24V 100A charger (120VAC/45-65Hz) for charging starting battery and house bank from generator or shore power.
 - (3) Victron Phoenix 3000VA (24V) inverters.
 - (2) Victron AMG 220 Amp, deep cycle, 12 VDC batteries for the engines start with crossover switch. Connected in series for 24 VDC.
 - (2) Victron AMG 220 Amp, deep cycle, 12 VDC batteries for the generator start with crossover switch. Connected in series for 24 VDC.
 - All starter batteries charged by (2) engines (80 Amps each) and (2) generators driven alternators (25 Amps each).
 - (12) Victron AMG 220 Amp batteries for house bank.
 - Victron AMG 220 Amp batteries for nav/com electronics.
 - Victron Phoenix charger 12V 30A for charging electronics backup battery.
 - All batteries covered with fiberglass caps.
 - Battery cutoff switches located in the engine room.
- **Lighting system and power outlets**
 - All interior lights are 110V AC and 24VDC LED.
 - Exterior lights (LED and Halogen) are waterproof to IP-67 standards.
 - 110V AC fluorescent and 24V DC LED lights in the engine room.
- **Controls and alarms**
 - Flybridge control station with dash console comprises efficient layout of the vessel electronics and machinery controls - optional .
 - Maretron monitoring and control system.
 - Onan generators digital LCD displays mounted in the pilothouse dash, each with start/stop button. Optional.
 - Twin engine throttle control in pilothouse.
 - Cummins engine 7" color monitors mounted on the pilothouse dash.
 - Racor fuel filters have pressure gauges.
 - Kobelt manual hydraulic steering pumps in the pilothouse.
 - All electric bilge pumps have manual/auto rocker switches.
 - Bilge pump system display panel with "ON" indicators with bilge pump and high water sensors audible alarms.
 - (5) Exalto windshield wiper controls in the pilothouse.
 - Exalto windshield washdown control in the pilothouse.
 - Carlisle & Finch search light switch with remote control in the pilothouse. Optional.

- Buell dual trumpet marine horn switch in the pilothouse.
- (8) Maretron fuel tank level sensors and (2) visual fuel gauges on each day tank.
- Maretron level sensor for fresh water tank.
- Maretron gray water tank level sensor.
- Maretron black water tank level sensor.
- Central smoke alarm by Maretron system.
- Fireboy engine room fire alarm.

Fire alarm and safety system

- Maretron smoke alarm system.
- Maretron SH-002 Smoke/Heat Detector in each room.
- Maretron CO-CO1224T Carbon Monoxide Detector in each room on lower deck and engine room.
- Fireboy Xintex automatic deployment fire extinguishers in the engine room.
- Fireboy Xintex automatic deployment fire extinguishers in the Lazarette. Optional.
- Remote control pull handle for manual deployment of Fireboy system in engine room from cockpit.
- Fireboy system includes automatic shut off for engines, generators and air intake fans.

Bilge pump system

- (12) Johnson 4,000 gallon/hour bilge pumps.
- Each bilge has an Ultra SR automatic high water alarm bilge pump switch installed.
- Vented loops 1 3/4" on bilge pump discharge hoses.
- Bilge pump system display panel with "ON" indicators with bilge pump and high water sensors audible alarms.
- Electric self-priming centrifugal emergency bilge/fire pump. Optional.

Fuel system

- (6) Main fuel tanks. Total capacity 6,270 gallons/23,720 liters.
- (2) "Day Tank" fuel tanks. Total capacity 770 gallons/2,900 liters.
- 1" ventilation pipes of each tank.
- Maretron fuel level monitoring of all tanks with pressure or ultrasonic sensors in each fuel tank.
- Reverso MA-6 fuel intake manifold with 1/2" fuel hoses.
- Reverso MA-6 fuel outflow manifold with 1/2" fuel hoses.
- Reverso aluminum fuel feed manifold with 1/2" valves and fuel hoses to each engine and generator.
- Reverso fuel polishing and transfer system - 210 GPH, Series - 'S' Class, marine version, 7 day digital timer, 110V, with fuel conditioner. Optional.
- Auxiliary fuel transfer pump.
- Central fueling station with steel pipe connections and lines to main tanks.
- Day tanks provide fuel feed for all engines and generators.
- Cummins engines equipped with Racor 75/1000 dual filter/separators using 30 micron filter elements and including vacuum pressure gauges.
- Onan generators equipped with Racor 1000 fuel filter/separators using 30 micron filter elements and including vacuum pressure gauges.

Fresh water system

- (2) Built-in total capacity 1,160 gallons / 4,400 liters fresh water tanks . Steel construction with baffles and inspection plate, coated with FDA approved enamel.
- Water tanks are equipped ventilation pipes.
- Each fresh water tank includes one inspection hatch, sight gauge, shut-off valve, and 1-1/2 " stainless steel water intake.
- (2) HeadHunter XR-124 24V fresh water pumps, 45 PSI, 16 gallons/60 liters per minute. 26 gallons/100 liters Headhunter PT- 102 accumulator pressure tank.
- Cold water manifold with valves located in the cofferdam.
- Hot water manifold with valves located in the cofferdam.
- PPR color coded piping for fresh water lines.
- (2) Torrid 40 gallon marine water heaters located in the cofferdam.
- Water maker, located in the engine room. Optional.
- UV inline sterilizer for tap water, 110V. Optional.

Deck wash system with fresh water

- Jabsco fresh water pump 24V, 10 PSI, 3,5 gallons/14 liters per minute installed in Cofferdam.
- Jabsco 31911 fresh water hose bib for wash down on the boat deck.
- Jabsco 31911 fresh water hose bib for wash down on the bow deck.
- Jabsco 31911 fresh water hose bib for wash down on the cockpit.

Black and gray water systems

- Maretron water level monitoring of all tanks with ultrasonic sensors in each tank.
- 500 gallons/1,890 liters integrated gray water tank with enamel coated interior to seal the steel tank and includes a level indicator. Headhunter Vortex 3/4 HP (24V) overboard macerator pump and handpump, steel line for shore pump out.
- 500 gallons/1,890 liters integrated black water tank with enamel coated interior to seal the steel tank and includes a level indicator. Headhunter Vortex 3/4 HP (24V) overboard macerator pump and handpump, steel line for shore pump out.
- (2) ventilation pipes of each tank, one on each side of the boat.
- PVC piping (D32 and 40mm) for black and gray water plumbing lines.

Sea water system

- Engines and generators are sea water cooled with strainers.
- Built-in sea chest under engine room.
- All through hull fittings and sea cocks are stainless steel.

Air conditioning, ventilation systems

- Central chilled water system with reverse cycle heating. Auxiliary electric heaters. Optional.
- **Air conditioning units:**
 - Main Deck, Pilothouse - 18,000 BTU. Main Deck, Galley - 12,000 BTU. Main Deck, Saloon - 24,000 BTU.
 - Lower Deck, Forward quarters - 12,000 BTU.
 - Lower deck, Double bunk stateroom (1) - 9,000 BTU. Lower Deck, Double bunk stateroom (2) - 9,000 BTU. Lower Deck, Master Stateroom - 18,000 BTU.
 - Lower Deck, Guest Stateroom (Starboard) - 12,000 BTU. Lower deck, Guest Stateroom (Port) - 12,000 BTU. Lower Deck, Engine Room - 18,000 BTU.
 - Lower Deck, Lazarette - 12,000 BTU. Optional.
- PPR color coded piping with thermo isolations for chiller water lines.
- Independent exhaust ventilation systems from heads, 24VDC.
- Engine room features both intake and outflow blowers. (2) fans, 110V AC.

Hydraulic system

- SidePower integrated hydraulic system. Includes all necessary blocks, hoses and components to operate bow (and stern) thruster and two windlasses.
- The integrated hydraulic system is driven by live PTOs on the main engines.
- Hydraulic pumps mounted on the gear boxes.
- All hydraulic hoses and fitting connections are secured using high-pressure flexible hoses

Stabilization system

- Seakeeper stabilizer system, model Seakeeper M35. Stabilizer controls located in the pilothouse.
- Side Power hydraulic stabilizer system with four fins. Stabilizer controls located in the pilothouse.

Insulation

- Engine room insulated with 4" composite insulation per Bering Yachts drawings.

- Aluminum panels installed on the ceiling and walls in the engine room and lazarette.
- Engines exhaust pipes wrapped and finished with carbon fiber covers.
- Sound insulation barrier installed between the engine room and living quarters.
- All bulkheads, ceilings and hull sides have acoustic and thermal insulation.
- All insulation materials are fire resistant.

Outfitting

- **Flybridge**
 - Teak deck. Optional.
 - Access from the aft stairs that lead up to the boat deck.
 - Scupper drains for rapid evacuation of water overboard.
 - Fiberglass molded-in settees with storage beneath.
 - Fixed table in front of settee.
 - Fiberglass counter top with built-in sink and faucet. Optional.
 - Aluminum roof with arch for mast.
 - Stainless steel framed windshield.
 - Stylized fiberglass mast to support and mount navigation antennas, radar arrays, communication domes and lights.
 - Carlisle & Finch 12-inch chrome searchlight. 110 VAC lamp with joystick (remote control) operation from the pilot house. Optional.
 - Forward and aft facing LED deck flood lights.
 - (4) LED flood lights mounted aft, forward, port and starboard. Optional.
 - LED courtesy lighting along the walk way.
 - Buell dual trumpet air horn .
 - Hella NaviLED navigation lights.
 - Hella NaviLED Anchor lights.
 - 44" high stainless steel safety rails.
 - 66" stainless steel flagpole.
 - Bering 77 name insignia signs mounted on both sides of the flybridge.
- **Boat deck**
 - Teak deck. Optional.
 - 44" high stainless steel 2" safety rails.
 - 66" tall 1.5" diameter stainless steel ensign staff.
 - Electric barbeque grill. Optional.
 - Fresh water hose bib for wash down.
 - Access to the boat deck from galley via stair and aluminum weathertight door.
 - Steelhead CT-2500 four function hydraulic yacht crane with 18' reach and 2,500 lbs. lifting capacity with remote control. Optional.
 - Dinghy - optional.
 - Custom fabricated stainless steel dinghy cradle with tie down securing straps - optional.
 - (2) OceanMaster LR 16 person SOLAS life rafts installed, one to port, one to starboard.
 - LED courtesy lights.
- **Bow deck**
 - Teak deck. Optional.
 - 66" tall 1.5" diameter stainless steel ensign staff.
 - Fresh water hose bib for wash down.
 - Flush deck aluminum hatch access to chain lockers with flat top.
 - (2) Maxwell 4500 series hydraulic winches with on deck foot switches. Dual chain stoppers with tensioners. Stainless steel, grooved bow rollers.
 - (3) heavy duty bollards.
 - Fiberglass molded-in settees with storage beneath.
- **Main deck**
 - Teak deck. Optional.
 - Stainless steel railing.
 - Two stainless steel hawse pipes with horn cleats mounted amidship port and starboard.
 - Vents for all fuel and fresh water tanks are located inside the bulwark.
 - Central fueling station recessed into superstructure amidships on port side. This single fill location allows for convenient replenishment of all fuel tanks.
 - Deck fill for fresh water tank on port side.
 - Gray and black water pump-out station on port side.
 - Stairs on port side from main deck to the boat deck.
- **Cockpit**
 - Teak deck. Optional.
 - Stainless steel railing.

- Fiberglass molded-in settees with storage beneath and fixed folding table.
- Fiberglass counter top with built-in sink and faucet.
- Transom gates on port and starboard sides at aft end of cockpit.
- (2) Glendinning Cablemaster shore power cord retrieving systems (Cablemaster Cm-7 50 amp with 100/30 meters of cable). Optional.
- LED courtesy lights.
- LED overhead lights.
- Recessed LED flood lights.
- **Swim platform**
 - Teak deck. Optional.
 - Access from swim platform to cockpit via stairs on port and starboard sides.
 - (5) 2" diameter, 3' tall, 316 stainless steel removable U-shape rails with self draining stainless steel base. Optional.
 - Hot and cold fresh water shower box.
 - (4) 12" stainless steel fold-down cleats.

Interior

- **Pilothouse**
 - Owner's choice of 1/2" thick engineered wood flooring.
 - (2) Aluminum weathertight doors - port and starboard.
 - Forward windows are 19 mm tempered glass with built-in electric heating wires for defrosting - optional.
 - Side windows are tinted glass with pleated window blinds.
 - Owner's choice of upholstery covered overhead panels.
 - Lacquered overhead panels - optional.
 - All overhead lights are dimmable.
 - Array of red LED lights above the dash console.
 - Red lights above the chart table.
 - LED courtesy lights.
 - 30" diameter stainless steel destroyer steering wheel.
 - LieBroc LX II helm chair with folding foot rest. Optional.
 - Leather upholstered helm bench settee with fixed table.
 - Chart table built in on forward port side of dash console.
 - Dash console and forward overhead console comprises efficient layout of all the vessel electronics and machinery controls.
 - Vimar electrical outlets.
 - 24,000 BTU air conditioning unit.
 - Adjustable wood overhead louvers for air conditioning and ventilation.
 - Smoke alarm sensor.
 - Fire extinguisher.
- **Pilothouse day head**
 - Ceramic tile floors and walls.
 - Marble floors and walls - optional.
 - Tinted windows with pleated window blinds.
 - Lacquered overhead panels.
 - All overhead lights are LED.
 - LED courtesy lights.
 - Vanity with Corian countertop.
 - Ceramic sink with stainless steel premium faucet (TBD).
 - Mirrors above the vanity.
 - SeaLand (Dometic) MasterFlush 8640 electrical fresh water toilet with bidet.
 - Vimar multiple duplex electrical outlets GFCI.
 - Exhaust ventilation.
 - Smoke alarm sensor.
- **Saloon**
 - Owner's choice of 1/2" thick engineered wood flooring.
 - Weathertight door to cockpit.
 - Teak hinged door access to the staircase leading to the engine room.
 - Stairs to up galley and pilothouse.
 - Tinted windows with pleated window blinds.
 - Owner's choice of upholstery covered overhead panels.
 - Lacquered overhead panels - optional.
 - Two distinct areas of dimmable LED overhead lights.
 - LED wall lights.
 - LED courtesy lights.
 - Built-in wood cabinetry for a 50" flat screen LCD television (TBD).

- L-shaped settee built-in on port side.
- Matching coffee table in front of the settee.
- Additional seating on the aft side.
- Dining table with six chairs on the starboard side.
- Vision Hi-Fi stereo system with tuner, AM/FM, sub woofer and flush mounted speakers in overhead. Optional.
- Vimar electrical outlets.
- 24,000 BTU air conditioning unit.
- 18,000 BTU air conditioning unit for galley.
- Adjustable wood overhead louvers for air conditioning.
- Smoke alarm sensor.
- Fire extinguisher.
- **Galley**
 - Owner's choice of 1/2" thick engineered wood flooring.
 - Weathertight door to boat deck via stair.
 - Tinted windows with pleated window blinds.
 - Owner's choice of upholstery covered overhead panels.
 - Lacquered overhead panels - optional.
 - All overhead lights are dimmable.
 - LED courtesy lights.
 - LED kickboard lights below the sink and oven.
 - Galley with Corian/Granite counter top.
 - Abundant storage lockers and drawers for storing dishes and galley ware.
 - Professional electric 4 burner glass top cooktop with overhead air vent (TBD).
 - Large stainless steel basin sink with garbage disposal (TBD) and macerator (TBD), premium pull out retractable stainless steel rinsing faucet (TBD).
 - Dishwasher (TBD).
 - Oven (TBD).
 - Trash compactor (TBD).
 - Microwave oven TBD).
 - Double drawer refrigerator (TBD).
 - Ice maker (TBD).
 - Side-by-side refrigerator with freezer (TBD).
 - Vimar multiple duplex electrical outlets.
 - Adjustable wood overhead louvers for air conditioning.
 - Smoke alarm sensor.
 - Fire extinguisher.
- **Master stateroom**
 - Owner's choice of 1/2" thick engineered wood flooring.
 - Tinted windows with pleated window blinds.
 - Owner's choice of upholstery covered overhead panels.
 - Lacquered overhead panels - optional.
 - All overhead lights are dimmable.
 - LED courtesy lights.
 - LED wall lights.
 - King-size bed.
 - Storage drawers under bed.
 - (4) Large wardrobes.
 - Night stands with drawers.
 - Mirror.
 - Vimar electrical outlets.
 - 24,000 BTU air conditioning unit.
 - Adjustable overhead louvers for air conditioning and ventilation.
 - Smoke alarm sensor.
 - CO alarm .
 - Fire extinguisher.
- **Dressing room**
 - Owner's choice of 1/2" thick engineered wood flooring.
 - Tinted windows with pleated window blinds.
 - Owner's choice of upholstery covered overhead panels.
 - Lacquered overhead panels - optional.
 - All overhead lights are dimmable.
 - LED courtesy lights.
 - Cabinets with shelves and extensive storage areas.
- **Master head**
 - Ceramic tile floors and walls.
 - ThermoSoft electric floor heating with control unit - optional .

- Marble floors and walls - optional.
 - Laquered overhead panels.
 - All overhead lights are LED.
 - LED courtesy lights.
 - Vanity with Corian countertop.
 - Ceramic sink with stainless steel premium faucet (TBD).
 - Mirrors above the vanity.
 - Shower cabin with glass door.
 - Premium stainless steel shower.
 - Drawer for shampoo, towel, etc.
 - SeaLand (Dometic) MasterFlush 8689 electrical fresh water toilet with bidet.
 - Vimar multiple duplex electrical outlets GFCI.
 - Exhaust ventilation.
 - Smoke alarm sensor.
- **Two (2) symmetrical guest staterooms (starboard and port sides)**
 - Owner's choice of 1/2" thick engineered wood flooring.
 - Door to the companionway on the lower deck.
 - Tinted windows with pleated window blinds.
 - Owner's choice of upholstery covered overhead panels.
 - Lacquered overhead panels - optional.
 - All overhead lights are dimmable LED.
 - LED courtesy lights.
 - LED wall lights.
 - King-size bed.
 - Storage drawers under bed.
 - Large wardrobe.
 - Night stands with drawers.
 - Mirror.
 - Vimar electrical outlets.
 - 12,000 BTU air conditioning unit.
 - Adjustable wood overhead louvers for air conditioning.
 - Smoke alarm sensor.
 - CO alarm .
 - Fire extinguisher.
- **Two (2) symmetrical guest head (starboard and port sides)**
 - Ceramic tile floors and walls.
 - ThermoSoft electric floor heating with control unit - optional .
 - Marble floors and walls - optional.
 - Laquered overhead panels.
 - Sliding doors from the guest staterooms.
 - All overhead lights are LED.
 - LED courtesy lights.
 - Vanity with Corian countertop.
 - Ceramic sink with stainless steel premium faucet (TBD).
 - Mirrors above the vanity.
 - Shower cabin with glass door.
 - Premium stainless steel shower.
 - Drawer for shampoo, towel, etc.
 - SeaLand (Dometic) MasterFlush 8689 electrical fresh water toilet with bidet.
 - Vimar multiple duplex electrical outlets GFCI.
 - Exhaust ventilation.
 - Smoke alarm sensor.
- **Companionway lower deck**
 - Owner's choice of 1/2" thick engineered wood flooring.
 - Owner's choice of upholstery covered overhead panels.
 - Lacquered overhead panels - optional.
 - All overhead lights are LED.
 - LED courtesy lights.
 - Smoke alarm sensor.
 - CO alarm .
- **Crew common room**
 - Owner's choice of 1/2" thick engineered wood flooring.
 - L-shaped built-in settee with table on port side.
 - Mini kitchenette cooking station with microwave oven (TBD), two burner electric stove top and including storage cabinets below.

- Clothes washer (TBD).
- Clothes dryer (TBD).
- 32" TV (TBD) on wall mount.
- Tinted windows with pleated window blinds.
- Owner's choice of upholstery covered overhead panels.
- Lacquered overhead panels - optional.
- All overhead lights are dimmable LED.
- LED courtesy lights.
- Vimar electrical outlets.
- 12,000 BTU air conditioning unit.
- Adjustable wood overhead louvers for air conditioning.
- Hatch access with stairs from the crew common room on the lower deck.
- Smoke alarm sensor.
- CO alarm .
- Fire extinguisher
- **Crew head**
 - Floor, walls and ceiling are fiberglass white color.
 - Two LED overhead lights.
 - Vanity with Corian countertop.
 - Ceramic sink with faucet.
 - Mirrors above the vanity.
 - Stainless steel shower.
 - Drawer for shampoo, towels, etc.
 - SeaLand (Dometic) MasterFlush 8649 electrical fresh water toilet with bidet.
 - Vimar multiple duplex electrical outlets GFCI.
 - Exhaust ventilation.
- **Two (2) symmetrical crew quarters forward**
 - Owner's choice of 1/2" thick engineered wood flooring.
 - Owner's choice of upholstery covered overhead panels.
 - Lacquered overhead panels - optional.
 - All overhead lights are dimmable.
 - LED courtesy lights.
 - Two reading lights.
 - Two single beds. One is pullman.
 - Storage drawers under the bed.
 - Large wardrobe.
 - Mirror.
 - Vimar electrical outlets.
 - 9,000 BTU air conditioning unit.
 - Adjustable wood overhead louvers for air conditioning.
 - Smoke alarm sensor.
 - CO alarm .
 - Fire extinguisher.

Miscellaneous

- As-built Owner's manual in English. Includes descriptions and systems drawings.
- Set of Warranty Certificates.
- Set of manuals and certificates relating to materials and equipment.
- Tool box.
- Spare parts for equipment, supplied by manufacturers.

Electronics and Navigation equipment

- (2) Furuno black box TZTBB system.
- (2) 24" HD monitors.
- (2) Furuno data organizer model FI-70.
- (2) Furuno radar model DRS25A (PSU13).
- (2) Furuno antenna model XN13A/6 (6 foot open array).
- Furuno depth finder model DFF1 BB.
- Furuno transducer model 556TID-LTD/12.
- Furuno satellite compass model SC-30.
- Furuno converter for SC30 model IF-NMEASCNMEA.

- Furuno GPS antenna receiver model GP330B.
- Airmar 220WX Ultrasonic Weather Station.
- Furuno transponder model FA 50 AIS Class B.
- AIS antenna 2,5m
- Furuno converter CAN bus/NMEA2000 model IF-NMEA2K2
- Furuno FI-5002 Junction Box
- Furuno HUB-101 Ethernet Hub
- Navpilot control unit, processor, rudder reference model 711C.
- Furuno rate heading sensor model PG 700
- Furuno pump model PUMPHRP05-24.
- Iridium satellite phone standard package model Extreme 9575.
- Icom VHF radio model M506-41 (Rear Mic), compliant to new FCC Class D DSC.
- (2) VHF antenna 2,5m
- Icom hand held VHF radio model M88-01-5W (compact radio).
- GlobalFix ACR-2842 Class A EPIRB Pro 406 CAT I w integral GPS
- PatFinder3 ACR SART-2714NH PatFinder3 Transponder w Bracket
- Set CCTV: six cameras
- True Marine DVD / Receiver model MS-AV700i
- True Marine receiver/media player with full iPod/iPhone control model MS-RA205
- True Marine 5 channel marine amplifier model MS-DA51600 1600 Watt D Class.
- (4) Marine Internal 6" ceiling speakers model MS-CL602 120W.
- (4) True Marine 7" speakers model MS-FR7021 260 Watt. White/Black 2 grilles including.
- (4) True Marine 10" woofer model MS-SW10400W.

Disclaimer

The Company offers the details of this vessel in good faith but cannot guarantee or warrant the accuracy of this information nor warrant the condition of the vessel. A buyer should instruct his agents, or his surveyors, to investigate such details as the buyer desires validated. This vessel is offered subject to prior sale, price change, or withdrawal without notice.

CONTACT BROKER



Atlantic Yacht & Ship, Inc.

Harbour Towne Marina
 850 NE 3rd Street
 Suite 213
 Dania Beach FL 33004 USA
 Phone: 954.921.1500
 Toll Free: 888.602.8105
 Fax: 954.921.1518
<https://atlanticyachtandship.com>



Atlantic Sales

Yacht Sales
 Harbour Towne Marina
 850 NE 3rd Street
 Suite 213
 Dania Beach FL 33004 USA
 Office: 954.921.1500
 Email: info@ayssales.com

